

TRIPLETT TB Series


TB-202 Dual LED Bargraph Indicator

Two, 101 segment LED indicators in one unit. This versatile bargraph has two isolated inputs and is available with Red, Amber or Green LED bars. The TB-202 can be mounted either vertically (standard) or horizontally.

DISPLAY Dual, 101 Segment LED Bar
CASE DIMENSIONS 1.42" W x 5.65" H x 6.25" D
PANEL CUTOUT 1.40" x 5.49"
WEIGHT 20.81 oz.
SCALE LENGTH 3.94"
BAR COLORS Red, Green, Amber
ACCURACY ± 1%, 1 Segment
OPERATING TEMPERATURE -5 to +60° C
STORAGE TEMPERATURE -40 to +70° C
RESPONSE TIME 500 ms
SAMPLING PERIOD 3.3/sec
DIELECTRIC WITHSTAND 2 kV RMS for 1 min between case and circuit


POWER SUPPLY
 5 VDC 2 W
 110 VAC (Std) 5 VA
 24 VDC 4 W
 220 VAC 5 VA

INPUT RANGES & IMPEDANCE
 0 - 1 mA DC 200 ohms
 4 - 20 mA DC 10 ohms
 1 - 5 V DC 250 K ohms
 0 - 10 V DC 250 K ohms

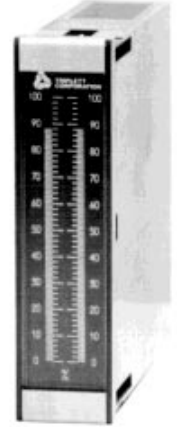

Maximize your panel space with the TB-202. Two isolated inputs in the space of one unit.

Dimensions & Panel Cutouts

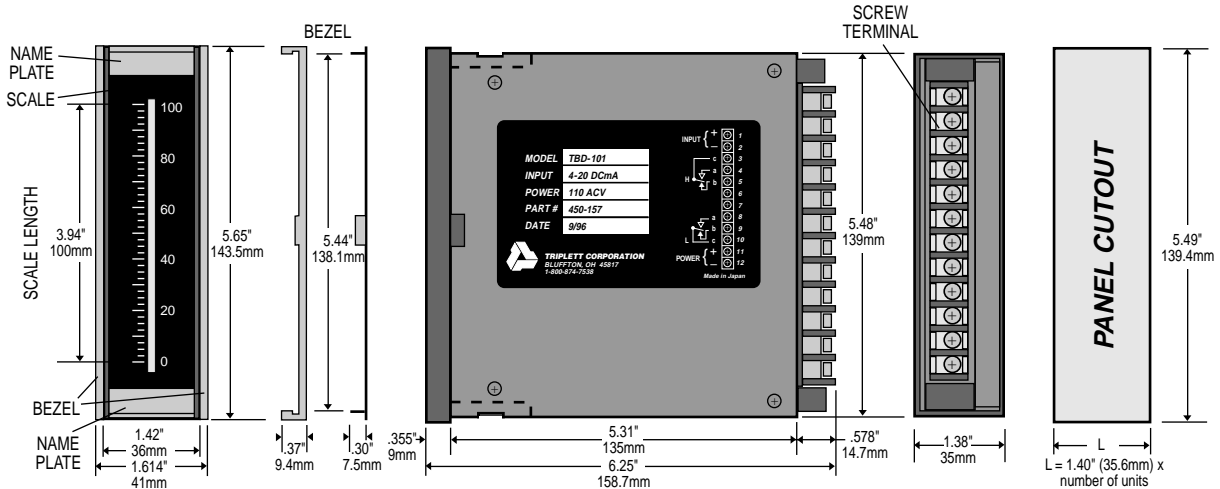

Call 800-TRIPLETT